







How to change glass for wing mirror on VW T5 Transporter – replacement guide



#### **VIDEO TUTORIAL**

### (i) Important!

This replacement procedure can be used for:


VW MULTIVAN V (7HM, 7HN, 7HF, 7EF, 7EM, 7EN) 1.9 TDI, VW TRANSPORTER V Box (7HA, 7HH, 7EA, 7EH) 1.9 TDI, VW TRANSPORTER V Bus (7HB, 7HJ, 7EB, 7EJ, 7EF, 7EG, 7HF, 7EC) 1.9 TDI, VW TRANSPORTER V Platform/Chassis (7JD, 7JE, 7JL, 7JY, 7JZ, 7FD 1.9 TDI

The steps may slightly vary depending on the car design.

WWW.AUTODOC.CO.UK



## REPLACEMENT: GLASS FOR WING MIRROR – VW T5 TRANSPORTER. TOOLS YOU'LL NEED:

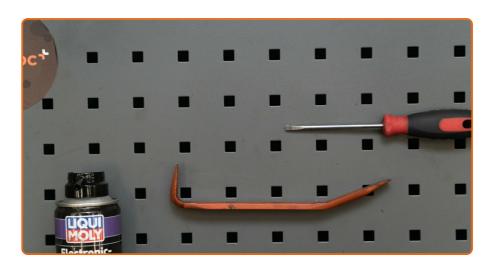

- Electronic spray
- Flat Screwdriver

- Plastic trim tool
- Fender cover

WWW.AUTODOC.CO.UK 2–14




## Replacement: glass for wing mirror – VW T5 Transporter. AUTODOC recommends:

- The replacement procedure is identical for the right and left side mirror glass.
- All work should be done with the engine stopped.

## REPLACEMENT: GLASS FOR WING MIRROR – VW T5 TRANSPORTER. RECOMMENDED SEQUENCE OF STEPS:

1

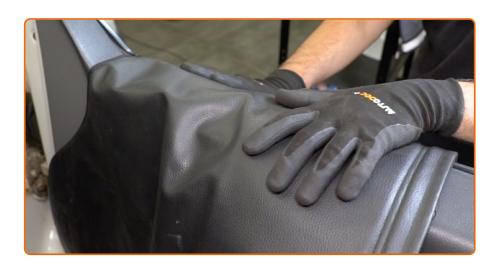

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

WWW.AUTODOC.CO.UK 3–14



Tilt the mirror glass out of the housing.

3



Carefully release the mirror glass from its attachment. Use a plastic trim tool. Use a flat screwdriver.

WWW.AUTODOC.CO.UK 4–14






Remove the mirror glass.

#### **AUTODOC** recommends:

• Replacement: glass for wing mirror – VW T5 Transporter. Do not use excessive force when removing the part as this may damage it.

5

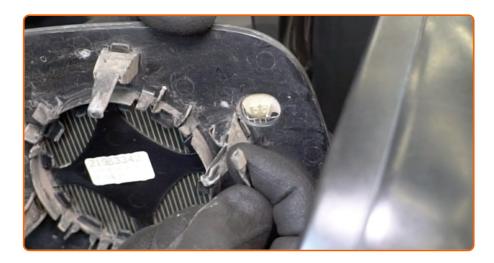

Detach the mirror heating connectors.

WWW.AUTODOC.CO.UK 5–14





Treat the mirror heating connectors. Use dielectric grease.

7



Attach the mirror heating connectors.

WWW.AUTODOC.CO.UK 6–14



Install the new mirror glass. Make sure you hear a click indicating that it is locked in place.

#### **AUTODOC** recommends:

- Replacement: glass for wing mirror VW T5 Transporter. To avoid damaging the part during installation, do not use excessive force.
- Make sure the mirror glass is positioned correctly. It should be aligned with the locking tabs on the housing.

WWW.AUTODOC.CO.UK 7–14



Clean the mirror glass.

10



Remove the fender protection cover.

WWW.AUTODOC.CO.UK 8–14



Switch on the ignition. This is necessary in order to make sure that the component operates properly.

12

Switch off the ignition.

WWW.AUTODOC.CO.UK 9–14



# DID YOU FIND THESE INSTRUCTIONS HELPFUL?

YES

NO




**BECOME A MEMBER OF AUTODOC CLUB!** 

WWW.AUTODOC.CO.UK 10–14



## AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

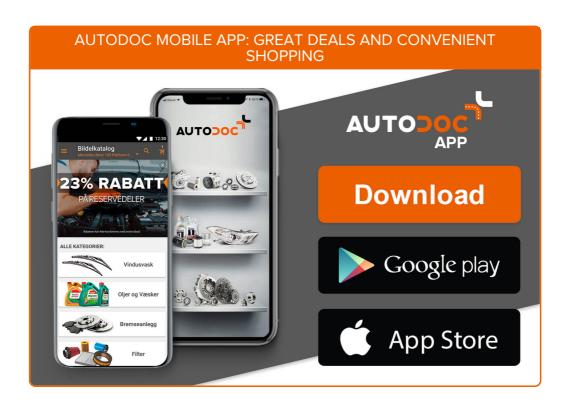



WWW.AUTODOC.CO.UK







WWW.AUTODOC.CO.UK 12–14







WWW.AUTODOC.CO.UK 13–14





### i Disclaimer:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AutoDoc shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AutoDoc shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AutoDoc shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AutoDoc strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2018 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by Autodoc GmbH.

WWW.AUTODOC.CO.UK